





Light distribution diagram 60°

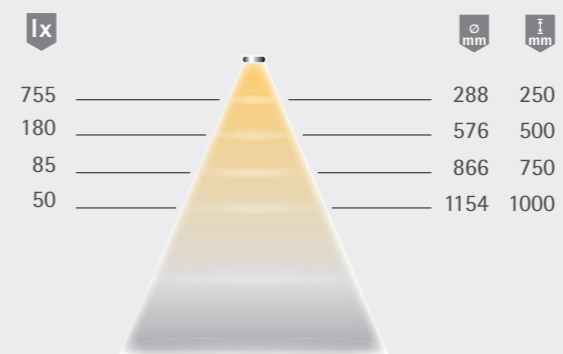

Light box

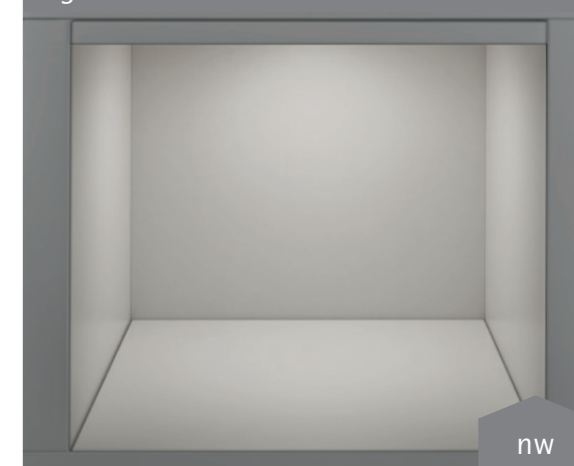

EcoPower Flood

Advantages

- ▶ Entry-level recessed spotlight
- ▶ Compact light

Examples of use

- ▶ Shelves
- ▶ Display cabinets

Features

- ▶ For 58 mm mounting diameter
- ▶ Wide beam without shadows

Technical details



12V

Luminaire type: LED recessed light
 Type of lighting: Functional/ accent lighting
 Surface finish: Aluminium look/ stainless steel look
 Operating voltage: 12 V DC
 Light colour: WarmWhite/ NeutralWhite
 Colour rendering: RA > 80
 Luminous flux: 150 lm
 Luminaire efficiency: 88 lm/W
 Light source efficiency: 106 lm/W
 Life span: 40,000 h (L70)
 Power consumption: 1.7 W
 Dimmable: Yes/PWM/Smart.home
 Beam angle: 90°
 Half value angle: 60°
 Test mark and symbols: CE, RoHS, Energy Star
 Protection rating: IP 44
 Installed diameter: 58 - 61 mm
 Supply lead: 2000 mm
 Plug connector: LED mini M1 plug connector
 Connection to: LED ballast

EcoPower Flood

	WarmWhite	NeutralWhite
Aluminium look	32 341 16	32 341 06
Stainless steel look	32 341 19	32 341 09

Accessories*

Surface-mounted housing in aluminium look	36 240 06
Surface-mounted housing in stainless steel look	36 240 09
LED ballast 20 W with flat Euro plug	31 016 01
M1 extension lead 1800 mm	36 768 01
M1 3-way distributor 180 mm	36 852 01
M1 6-way distributor 2000 mm	36 125 01

* Further accessories in section Switch systems

Dimensional drawing / installation

